
D	N R	efr	lge	ran	td	DW Refrigerant dryers	S						
Tech	nical d	lata •	Accordi	ng to IS	0 7183	and Cag	Technical data • According to ISO 7183 and Cagi Pneurop PN8NTC2	N8NTC2					
Туре	Max.working Pressure	orking sure	Air	Air Treatment Capacity	ent	Motor Power		Inlet / Outlet Connections	D:	Dimensions		Weight	
			_			۱. ۱	+	Ø		\bigwedge^{n}			refrigerant
	bar	psi	(J)	l/1' m³/h	cfm	٤	V/Hz/Ph	BSP	L/mm \	L/mm W/mm H/mm	H/mm	kg	gas
DW21	14	203	3.600	216	127	659	230/50/1	1 1/2" F	460	560	789	53	R410A
DW25	14	203	4.100	246	145	663	230/50/1	1 1/2" F	460	560	789	60	R410A
DW31	14	203	5.200	312	184	835	230/50/1	1 1/2" F	460	560	789	65	R410A
DW39	14	203	6.500	390	230	1016	230/50/1	1 1/2" F	580	590	668	80	R410A
DW46	14	203	7.700	462	272	1098	230/50/1	1 1/2" F	580	590	668	80	R410A

Your new e-dryer inside out:



A new range to improve your efficiency



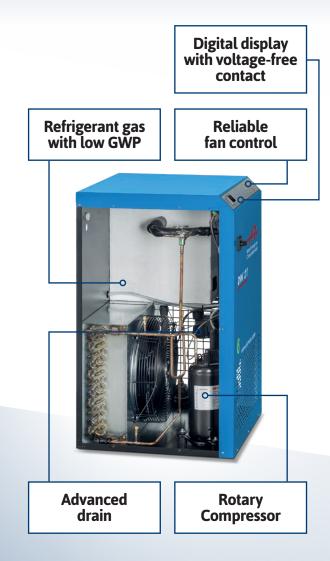

3 good reasons to choose the e-dryer

Cnergy-efficient

An e-dryer saves up to

% of electricity

on the average

In **1 year** two e-dryers save enough energy to illuminate the Eiffel tower one week long

Thanks to the rotary technology, an e-dryer saves enough to power an average home





After 4 days of turning, on Friday, your e-dryer turns

*©***xcellent** in operation



The rotary compressor is **20** to **30%** more efficient than piston technology

LONGER LIFETIME

- few moving parts
- less vibrations
- integrated liquid separator
- low noise-levels

ADVANCED DRAIN to reduce a risk of sticking floater



Remote free contacts guarantee peace of mind:

- too high/low pressure dew point
- too high refrigerant temperature
- unexpected leakages
- sensor probe failures

Convironmentally friendly

%

-19%

The Global Warming impact of the gas used in e-drvers is up to 47% lower than that used in the previous range

> e-dryers need 19[%] LESS refrigerant gas

R410A ecological gas **28.000 tons**

less CO, production per year worldwide

= 200.000.000 km driven in an average car



= total CO_2 emissions of 5600 people